



Switch Specification

2 Contacts in series

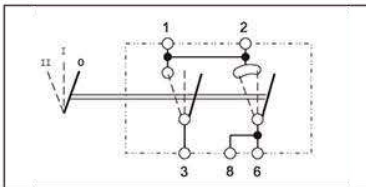


	Switch Function	Switch Type	Action	No of Terminals	Voltage	Light
Item 1	Right off	2 contacts in series	II-I-0	5	12v	Direct light
Item 2	Right off	2 contacts in series	II-I-0	5	24v	Direct light

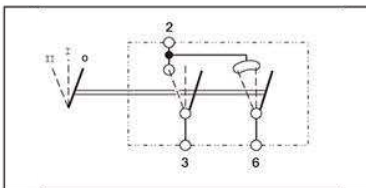


	Switch Function	Switch Type	Action	No of Terminals	Voltage	Light
Item 3	Right off	2 contacts in series	II-I-0	3	12v	Combination light
Item 4	Right off	2 contacts in series	II-I-0	3	24v	Diffused light


Change over contact

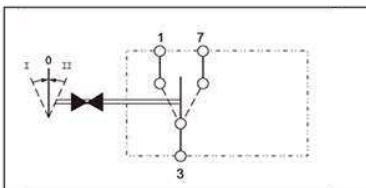


	Switch Function	Switch Type	Action	No of Terminals	Voltage	Light
Item 5	Centre off spring	Change over contact	I-0-II><	3	12v	Direct light
Item 6	Centre off spring	Change over contact	I-0-II><	3	12v	Diffused light
Item 7	Centre off spring	Change over contact	I-0-II><	3	12/24v	No

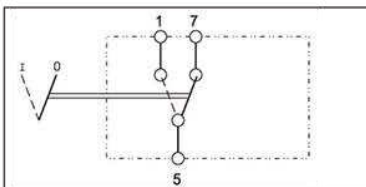

	Switch Function	Switch Type	Action	No of Terminals	Voltage	Light
Item 8	Right off	Change over contact	I-0	3	12v	Direct
Item 9	Right off	Change over contact	I-0	3	24v	Direct light

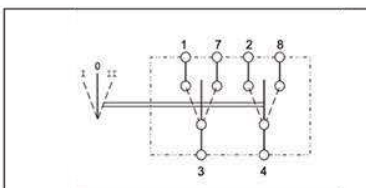

	Switch Function	Switch Type	Action	No of Terminals	Voltage	Light
Item 10	Centre off	Change over contact	I-0-II	6	12v	Direct light
Item 11	Centre off	Change over contact	I-0-II	6	12/24v	No

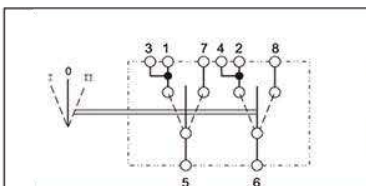

	Switch Function	Switch Type	Action	No of Terminals	Voltage	Light
Item 12	Centre off	Change over contact	I-0-II	8	12/24v	No
Item 13	Centre off	Change over contact	I-0-II	8	24v	Direct light

Key

0 - Switch off position
I - Function 1 ON

II - Function 2 ON
> - Spring right OFF

>< - Spring Centre OFF
OFF - Default spring switch position